


16N78 Athlonix™

Ø 16 mm • Precious metal commutation • 6.9 mNm

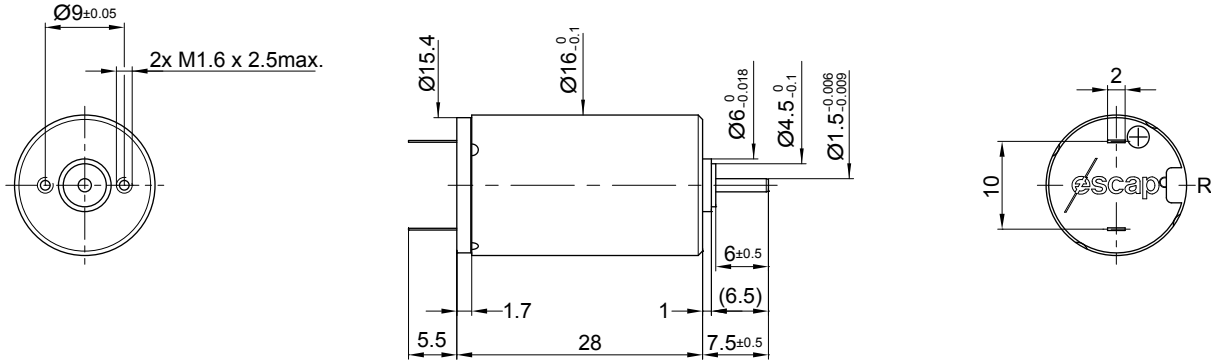

Dimensions in mm.

Electrical Data	Symbol	16N781001						Unit
		135	212P	214E	212E	210E	208E	
1 Nominal Voltage	V	1.5	6	9	12	18	24	Volt
2 No-Load Speed	n_0	7,894	8,350	8,275	8,380	8,530	8,200	rpm
3 No-Load Current	I_0	90.0	18.0	10.0	5.0	5.0	4.0	mA
4 Terminal Resistance	R	0.2	3.0	7.5	13.2	27.5	60.5	Ω
5 Output Power	$P_{2\text{max}}$	4.7	5.4	5.2	5.2	4.9	4.9	W
6 Stall Torque	mNm	13.5 (1.91)	13.6 (1.93)	12.4 (1.76)	12.4 (1.76)	13.1 (1.86)	11 (1.56)	mNm (oz-in)
7 Efficiency	h_{max}	83	82	83	86	83	81	%
8 Max Continuous Speed	$n_{e\text{max}}$	10,000	10,000	10,000	10,000	10,000	10,000	rpm
9 Max Continuous Torque	$M_{e\text{max}}$	6 (0.98)	6.9 (0.98)	6.6 (0.94)	6.6 (0.94)	6.2 (0.88)	6.3 (0.9)	mNm (oz-in)
10 Max Continuous Current	$I_{e\text{max}}$	3.41	1.03	0.65	0.49	0.34	0.23	A
11 Back-EMF Constant	k_E	0.19	0.71	1.08	1.42	2.09	2.90	mV/rpm
12 Torque Constant	k_M	1.80	6.80	10.30	13.60	20.00	27.70	mNm/A
13 Motor Regulation	R/k^2	62.0	64.9	70.7	71.37	69.0	78.85	$10^3/\text{Nms}$
14 Friction Torque	T_F	0.09 (0.02)	0.12 (0.02)	0.1 (0.02)	0.07 (0.01)	0.09 (0.02)	0.08 (0.02)	mNm (oz-in)
15 Rotor Inductance	L	0.01	0.10	0.30	0.50	1.00	2.40	mH
16 Mechanical Time Constant	τ_m	6.8	6.8	8.8	8.6	8.3	9.3	ms
17 Rotor Inertia	J	1.10	1.05	1.25	1.20	1.20	1.18	$\text{g}\cdot\text{cm}^2$

General Data					
18 Thermal Resistance (rotor/body)	$R_{\text{th1}}/R_{\text{th2}}$	6/25		$^{\circ}\text{C}/\text{W}$	
19 Thermal Time Constant (rotor/stator)	t_{W1}/t_{W2}	12/250		S	
20 Operating Temperature Range:	motor	-30°C to 85°C (-22°F to 185°F)		$^{\circ}\text{C}$ ($^{\circ}\text{F}$)	
	rotor			100°C (212°F)	$^{\circ}\text{C}$ ($^{\circ}\text{F}$)
21 Shaft Load Max.: (5 mm. from bearing)	-radial -axial	With sleeve bearings		N (oz)	
				1.5 (5.4)	N (oz)
				100 (359.6)	mm (inch)
22 Shaft Play:	-radial	<0.03 (0.0012)		mm (inch)	
	-axial	0.15 (0.0059)		mm (inch)	
23 Weight	g	24 (0.85)		g (oz)	

Execution Table

Gearbox	Single Shaft	MR2
B16	1005	1008
BA16	1005	1008
R16	1001	1007

