



OPTIONS



VERSIONS

Type	Force N	Feed mm/s	Pitch of screw mm	Resolution $\mu\text{m}/\text{step}$	Current per Winding A	Resistance per Winding Ohm	Weight kg	Stroke „A“ mm	Housing Length „B“ mm	Length „A“ mm
L3518S1204-T6X1-A	240	50	1	5	1.2	1.85	0.24/0.28	25/50	43/68	34
L3518S1204-T6X2-A	160	100	2	10	1.2	1.85	0.24/0.28	25/50	43/68	34
L3518S1204-T5X5-A	85	250	5	25	1.2	1.85	0.24/0.28	25/50	43/68	34

ORDER IDENTIFIER

L3518S1204-T6X1-
 A25 = 25 mm Stroke „A“
 A50 = 50 mm Stroke „A“



ACCESSORIES

Nanolube Lubricant




CAUTION



The force and power ratings specified in the data sheets are based on a duty cycle of 10% to 20% and must be reduced for higher values. Moving against fixed end stops should be avoided.

DIMENSIONS (IN MM)

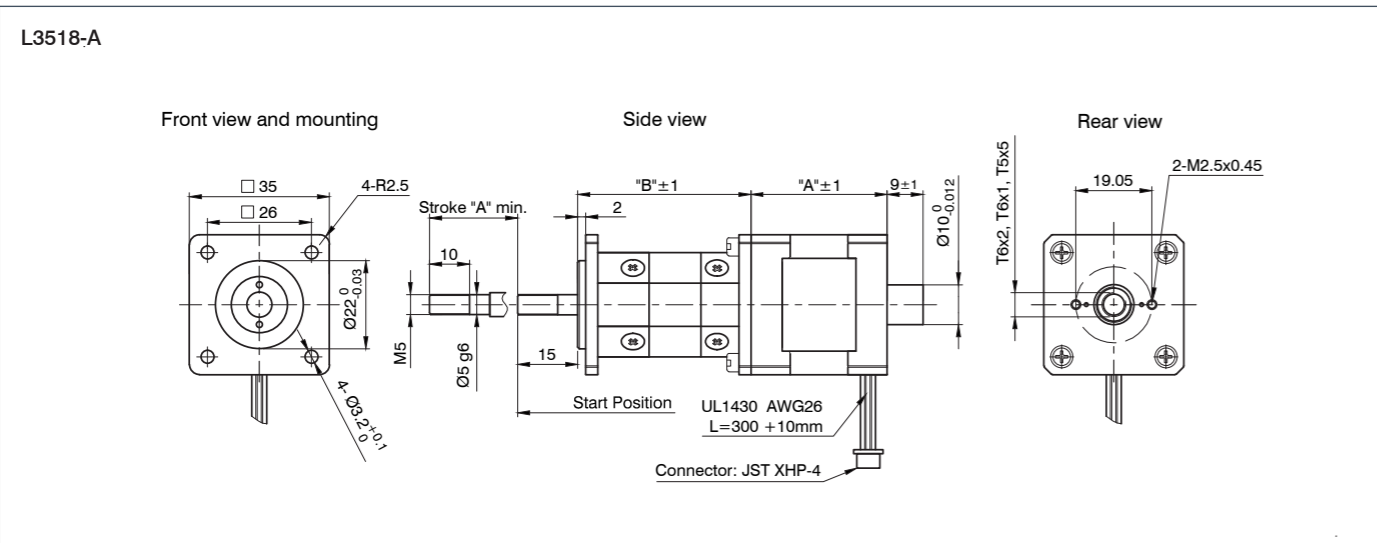

TORQUE CURVES

