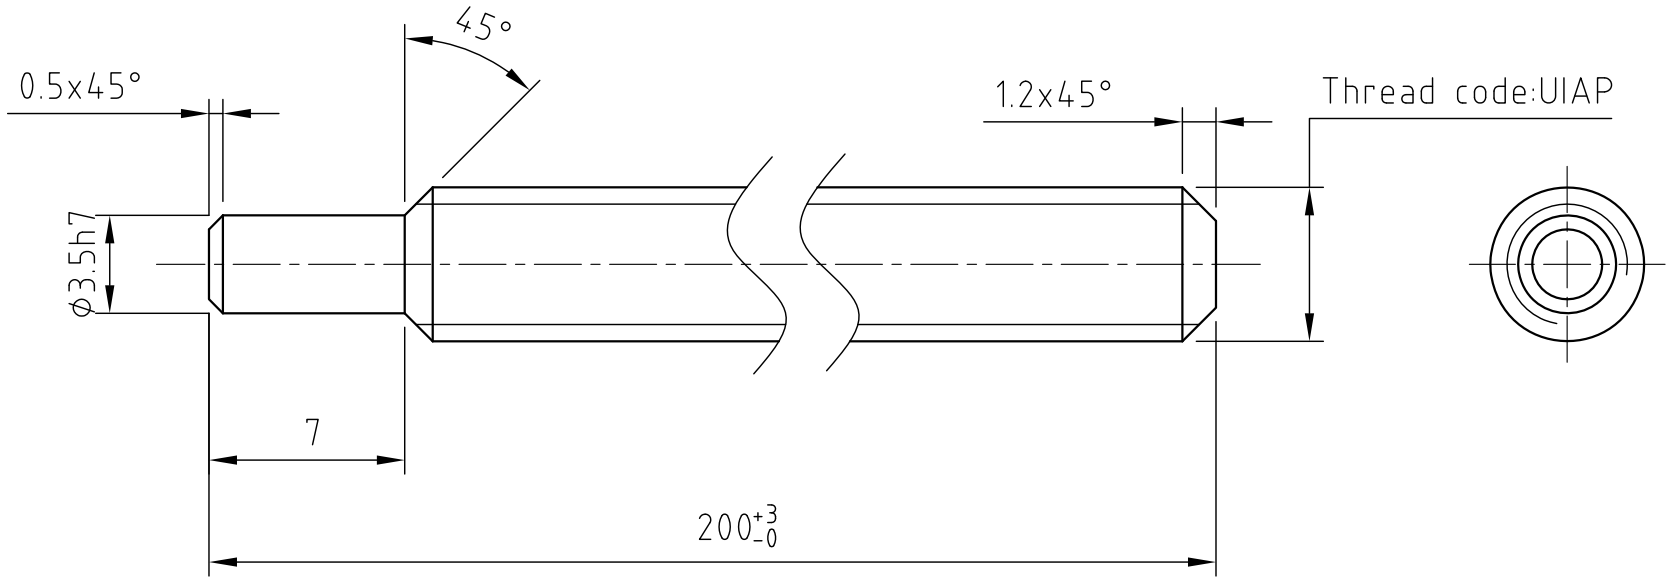

Thread code UIAP	
Thread type	ACME
Major diameter [mm]	5.431...5.558
Minor diameter [mm]	4.402...4.694
Lead	0.6096
Pitch	0.6096
Starts	1
Thread per inch	41.67

REV	DESCRIPTION	DATE	DRN

Surface specification DIN ISO 1302

General tolerances DIN ISO 2768- mK

Work piece edge DIN ISO 13715

Scale:

Material: 1.4301

Nanotec® PLUG & DRIVE

	Name	Date
DRN	L W	10.04.2018
CHKD	GYQ	10.04.2018
APVD	P.R.	10.04.2018

THREADED SPINDLE

SCREW-ABA-UIAP-200