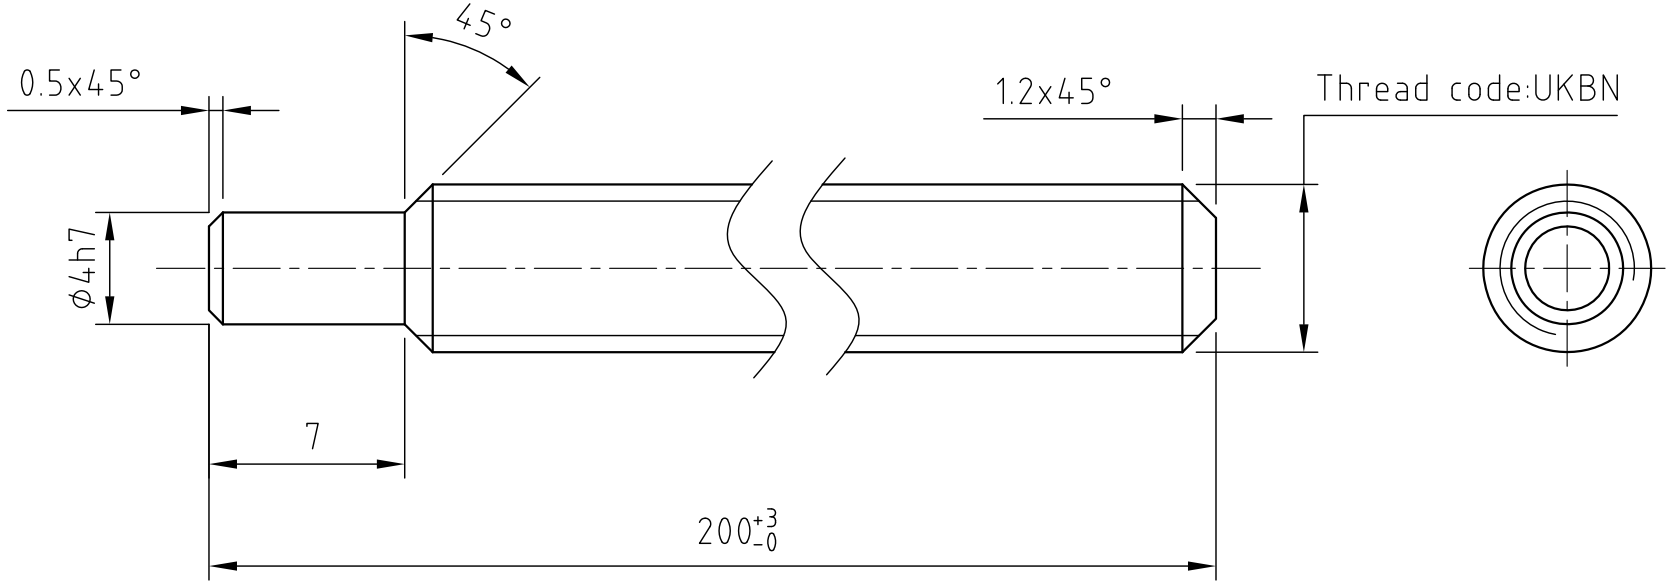


| Thread code UKBN | |
|---|---|
| Thread type | ACME |
| Major diameter [mm] | 6.223...6.350 |
| Minor diameter [mm] | 4.107...4.509 |
| Lead | 1.5875 |
| Pitch | 1.5875 |
| Starts | 1 |
| Thread per inch | 16 |

| REV | DESCRIPTION | DATE | DRN |
|---|---|---|---|
| | | | |
| | | | |
| | | | |
| | | | |

Surface specification DIN ISO 1302

General tolerances DIN ISO 2768- mK

Work piece edge DIN ISO 13715

Scale:

Material: 1.4301

Nanotec® PLUG & DRIVE

| | Name | Date |
|---|---|---|
| DRN | L W | 12.04.2018 |
| CHKD | GYQ | 12.04.2018 |
| APVD | P.R. | 12.04.2018 |

# THREADED SPINDLE

## SCREW-ABA-UKBN-200